




ITEM	SPECIFICATION		
Clear-Span Width	15m	20m	25m
Eave Height	4m		
Ridge Height	6.38m	7.16m	7.95m
Roof Pitch	20°		
Bay Distance	5m		
Longest Component	8.1m	10.7m	10.7m
Minimum Tent Length	10m		
Maximum Tent Length	No Limit		
Roof Fixing	Bar Tensioning		
Main Profile	203 x 112 x 4mm (4-channel)		
Max Allowed Windspeed	80km/hr 0.5kn/m2		
Eave Connection	Hot-dip galvanized steel insert		
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)		
Cover Material	850gsm White or Coloured PVC 950gsm Clear PVC	650gsm White PVC	
Wall Fabrics		850gsm Coloured PVC 950gsm Clear PVC	
Printing	Full Roof Digital Printing		
Engineer Certification	Engineer Structural Certificate		
Manufacturer's Warranty	10 Year Frame 5 Year White / Coloured PVC 2 Year Printed PVC / Clear PVC		

ACCESSORIES

Accessories
 PVC Window Sidewalls
 Rain Gutter
 Lining & Curtains
 Glass & Aluminum Door Units
 Hard Walling System
 Glass Walling System
 Transparent PVC Cover & Sidewall
 Flooring Systems
 Weight Plate


AVAILABLE COLOURS

*additional cost may be applicable and subject to availability

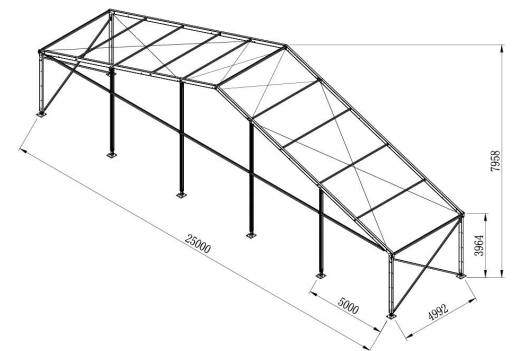


FRAMEWORK & MAIN PROFILES

203 x 112 x 4mm (4-channel)

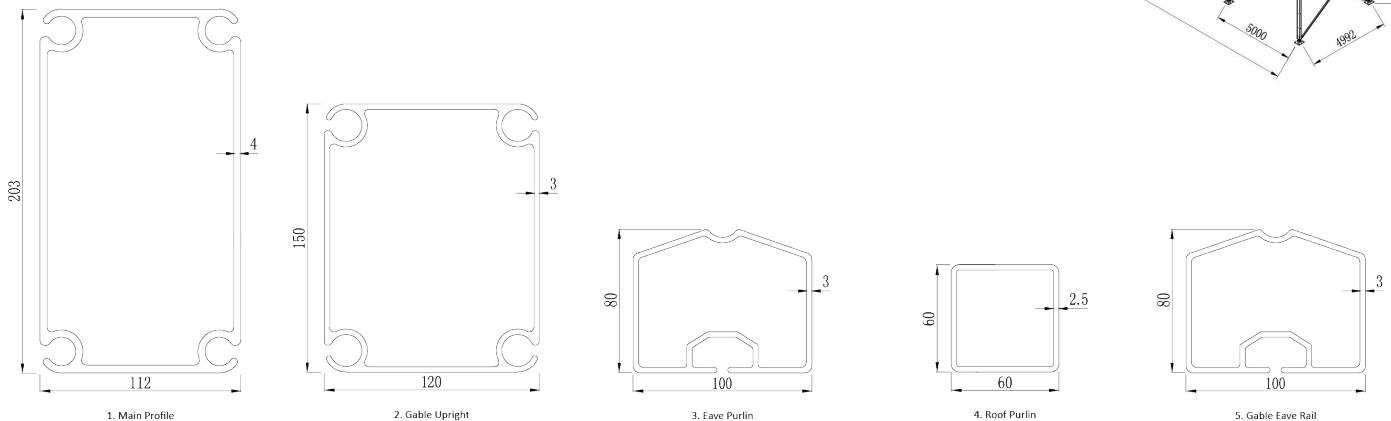


STYLES AVAILABLE

A FRAME

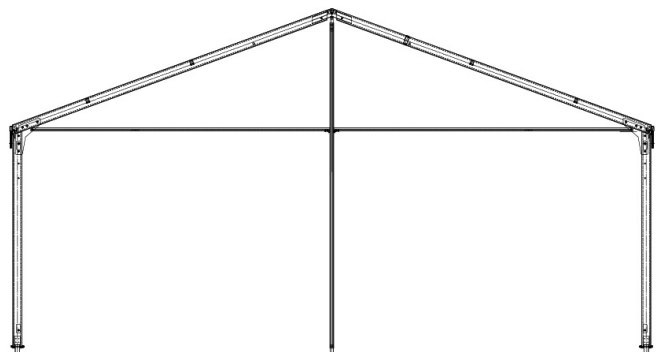


ACRUM

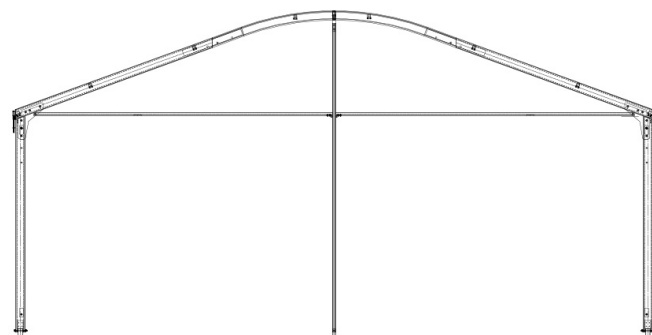


SPANS AVAILABLE

15m GABLE SPAN

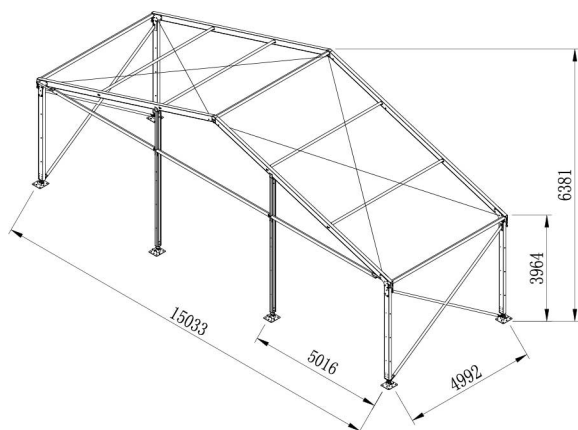

20m GABLE SPAN

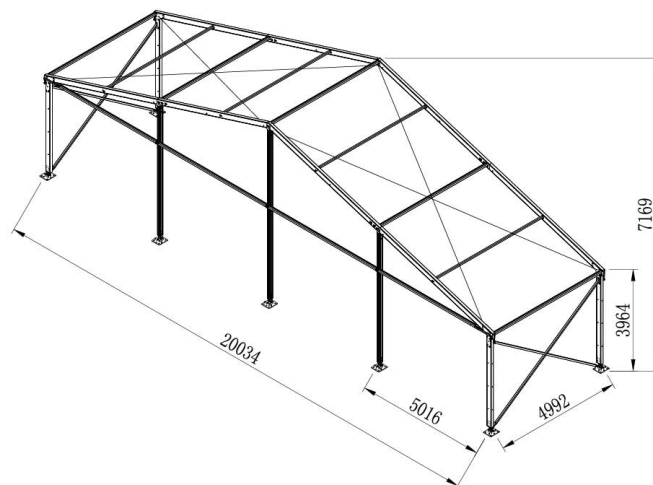

25m GABLE SPAN

