



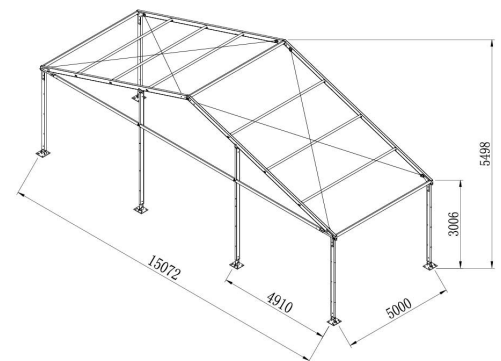
ITEM	SPECIFICATION		
Clear-Span Width	10m	12m	15m
Eave Height	3m		
Ridge Height	4.68m	5.01m	5.49m
Roof Pitch	20°		
Bay Distance	5m		
Longest Component	5.5m	6.4m	8.1m
Minimum Tent Length	10m		
Maximum Tent Length	No Limit		
Roof Fixing	Bar Tensioning		
Main Profile	166 x 88 x 3mm (4-channel)		
Max Allowed Windspeed	80km/hr 0.3kn/m2		
Frame Upgrade available	91km/hr		
Eave Connection	Hot-dip galvanized steel insert		
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)		
Cover Material	850gsm White or	650gsm White PVC	
Wall Fabrics	Coloured PVC	850gsm Coloured PVC	
	950gsm Clear PVC	950gsm Clear PVC	
Printing	Full Roof Digital Printing		
Engineer Certification	Engineer Structural Certificate		
Manufacturer's Warranty	10 Year Frame 5 Year White / Coloured PVC 2 Year Printed PVC / Clear PVC		

ACCESSORIES

Accessories
PVC Window Sidewalls
Rain Gutter
Lining & Curtains
Glass & Aluminum Door Units
Hard Walling System
Glass Walling System
Transparent PVC Cover & Sidewall
Flooring Systems
Weight Plate


AVAILABLE COLOURS





*additional cost may be applicable and subject to availability



FRAMEWORK & MAIN PROFILES

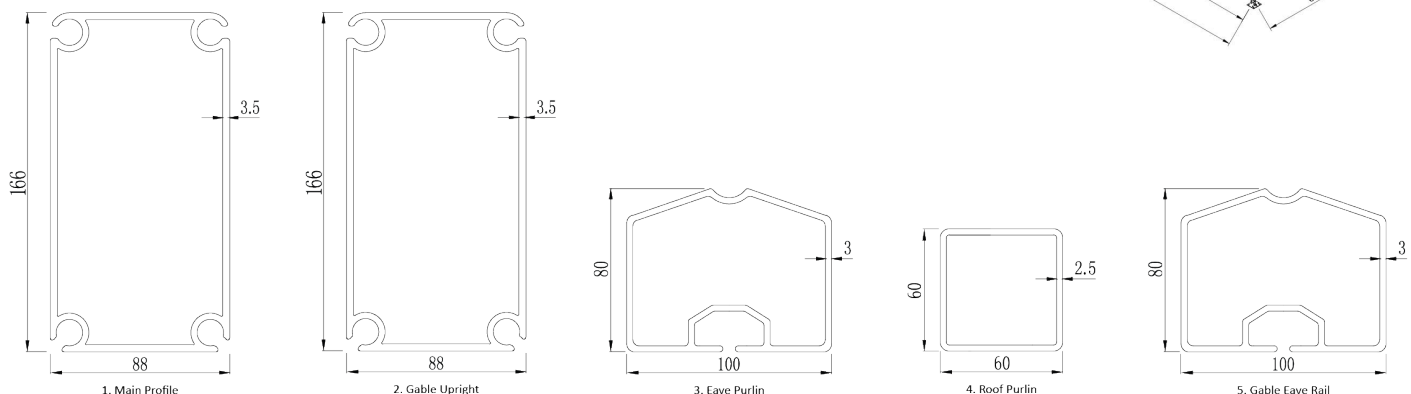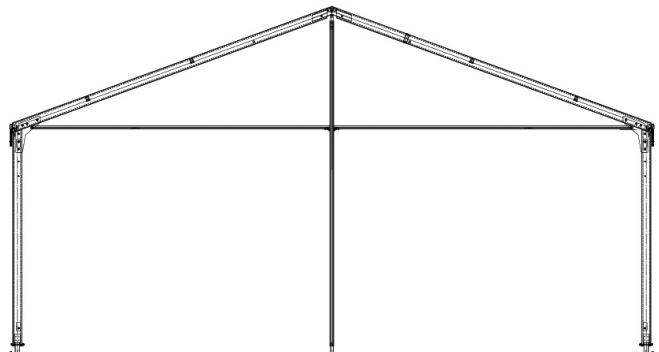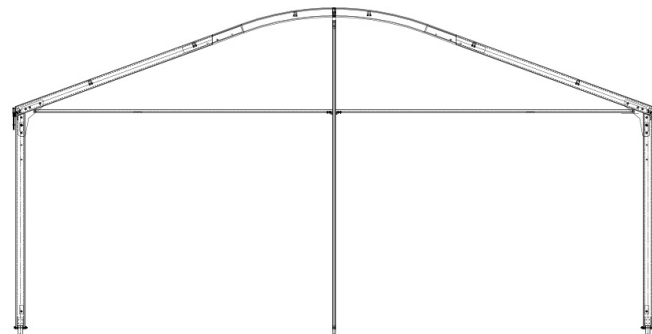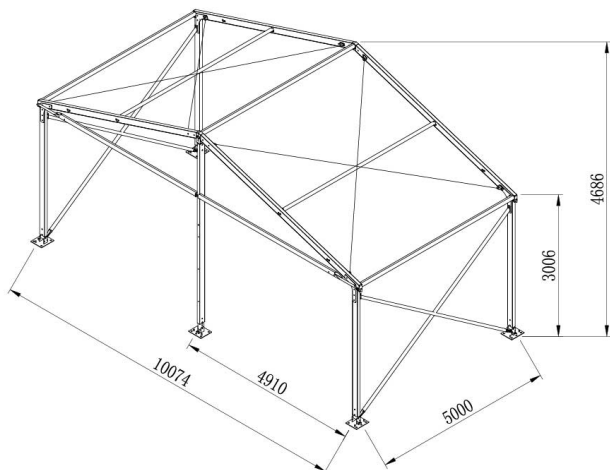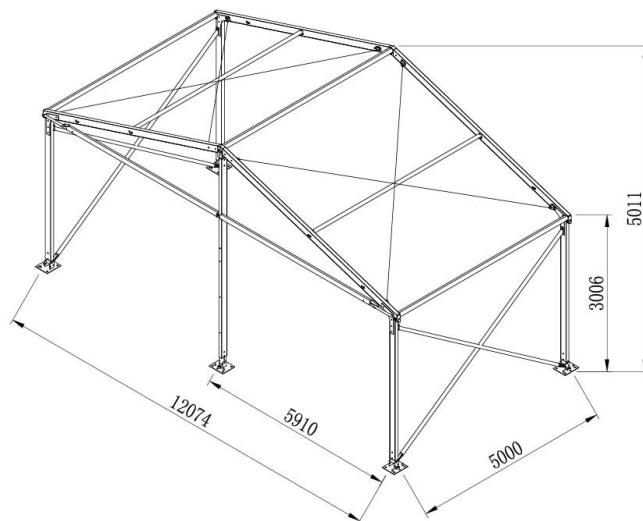166 x 88 x 3mm (4-channel)



STYLES AVAILABLE
A FRAME

ACRUM

SPANS AVAILABLE
10m GABLE SPAN

12m GABLE SPAN

15m GABLE SPAN
