









ITEM	SPECIFICATION			
Clear-Span Width	8m	9m	10m	12m
Eave Height	2.6m			
Ridge Height	4.19m	4.34m	4.34m	4.87
Roof Pitch	20°			
Bay Distance	3m			
Longest Component	4.4m	4.8m	5.5m	5.4m
Minimum Tent Length	6m			
Maximum Tent Length	No Limit			
Roof Fixing	Bar Tensioning			
Main Profile	100 x 48 x 3mm (4-channel)			
Max Allowed Windspeed	80km/hr 0.3kn/m2			
Eave Connection	Hot-dip galvanized steel insert			
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)			
Cover Material	850gsm White or Coloured		650gsm White PVC	
Wall Fabrics	PVC		850gsm Coloured PVC	
	950gsm Clear PVC		950gsm Clear PVC	
Printing	Full Roof Digital Printing			
Engineer Certification	Engineer Structural Certificate			
Manufacturer's Warranty	10 Year Frame 5 Year White / Coloured PVC 2 Year Printed PVC / Clear PVC			






ACCESSORIES

Accessories
 PVC Window Sidewalls
 Rain Gutter
 Lining & Curtains
 Glass & Aluminum Door Units
 Hard Walling System
 Glass Walling System
 Transparent PVC Cover & Sidewall
 Flooring Systems
 Weight Plate

AVAILABLE COLORS

*additional cost may be applicable and subject to availability

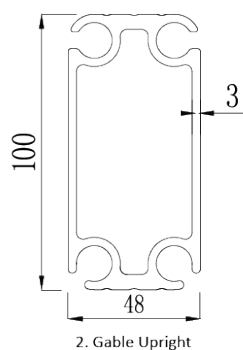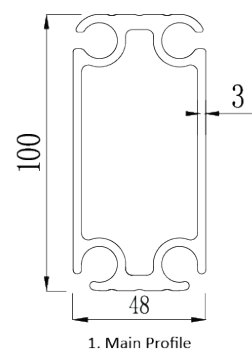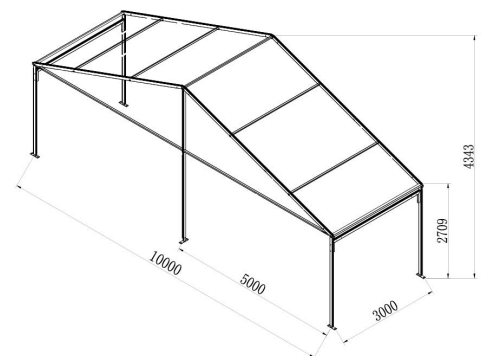

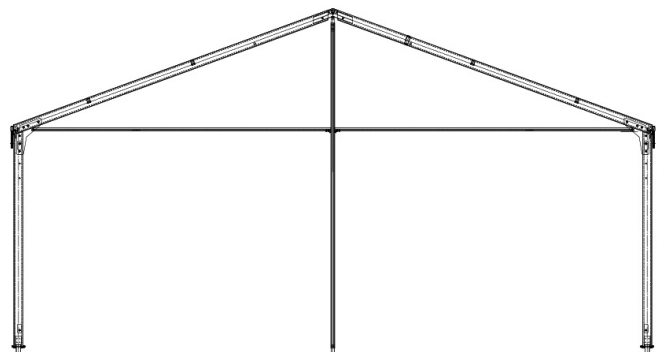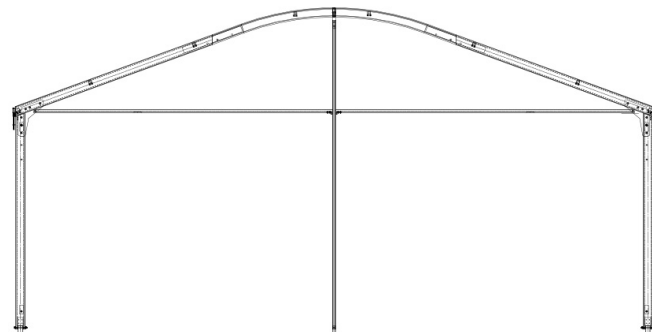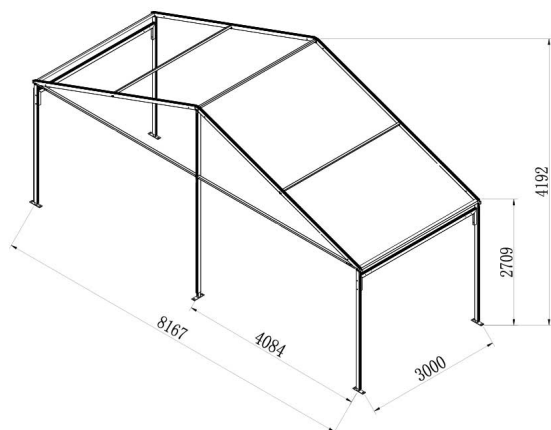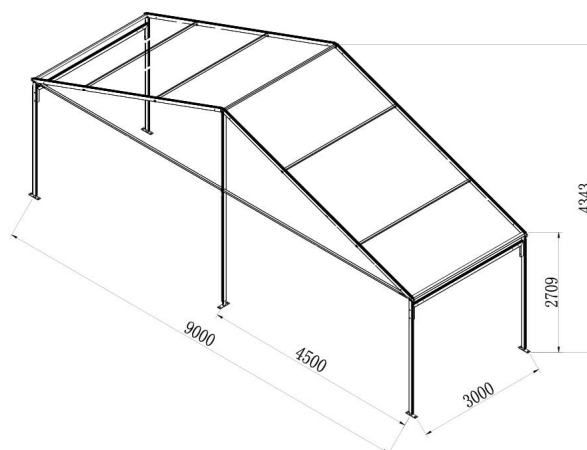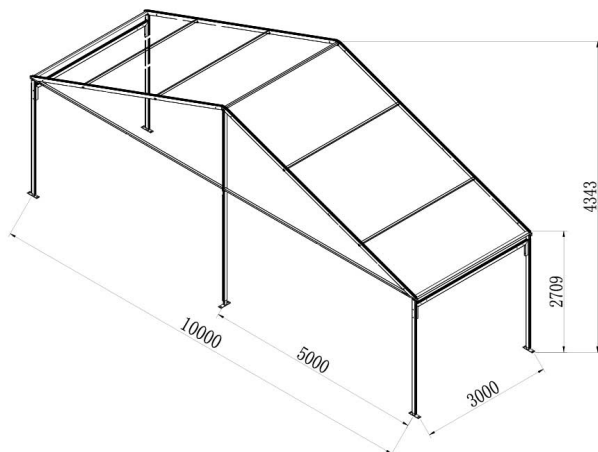STYLES AVAILABLE
A FRAME

ACRUM

SPANS AVAILABLE
8m GABLE SPAN

9m GABLE SPAN

10m GABLE SPAN

12m GABLE SPAN
