# CREST RANGE

# FUNCTION STANDARD SERIES

√lain Profile 84 x 48 x 3mm, 2-channe



### **PRODUCT SHOWN**

3

30

6m Span x 6m Length -FS Series 84 White Roof & Clear Walls OS

H

-






















# **FS** 84


The Function Standard (FS) Series features our professional 3m bay in a selection of spans.

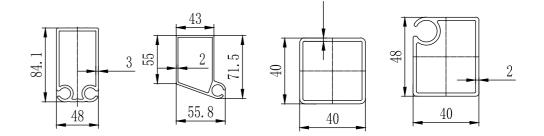

### Overview

### Event Marquee Size

Span Width: 3m/ 4m/ 5m/ 6m/ 8m Bay Distance: 3m Minimum Tent Length: 3m Maximum Tent Length: No Limit Roof Pitch: 20°

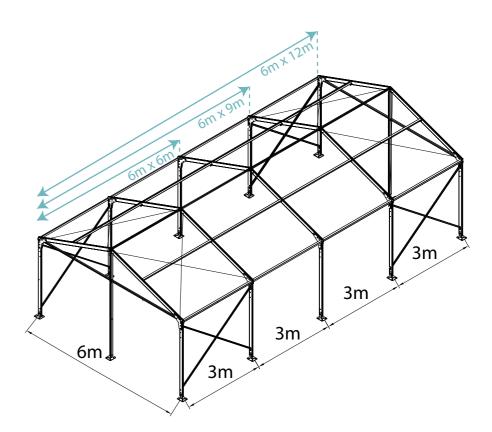

### Frame Specifications

Eave Height: 2.6m Main Profile: 84 x 48 x 3mm Roof Fixing: Bar Tensioning Max Windspeed: 80km/hr


# Specifications



Clear-Span Width	3m	4m	5m	6m	8m	
Eave Height	2.6m					
Ridge Height	3.23m	3.41m	3.59m	3.77m	4.19m	
Roof Pitch	20°					
Bay Distance	3m					
Longest Component	3m	3.9m	3.5m	3.6m	4.4m	
Minimum Tent Length	3m					
Maxmimum Tent Length	No Limit					
Roof Fixing	Bar Tensioning					
Main Profile	84 x 48 x 3mm (2-channel)					
Max Allowed Windspeed	80km/hr 0.3kn/m2					
Eave Connection	Hot-dip galvanized steel insert					
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)					
Cover Material   Wall Fabrics	850gsm white or coloured PVC   950gsm clear PVC   650gsm White PVC					
Printing	Full Roof Digital Printing					
Certification	3m 4m 5m Engineer Certification					
	6m 8m 9m Engineer Certification					
	Fire Reterdant PVC					
Manufacturer's Warranty	10 Year Frame   5 Year White / Coloured PVC   2 Year Printed PVC / Clear					
	PVC					




# Technical Information

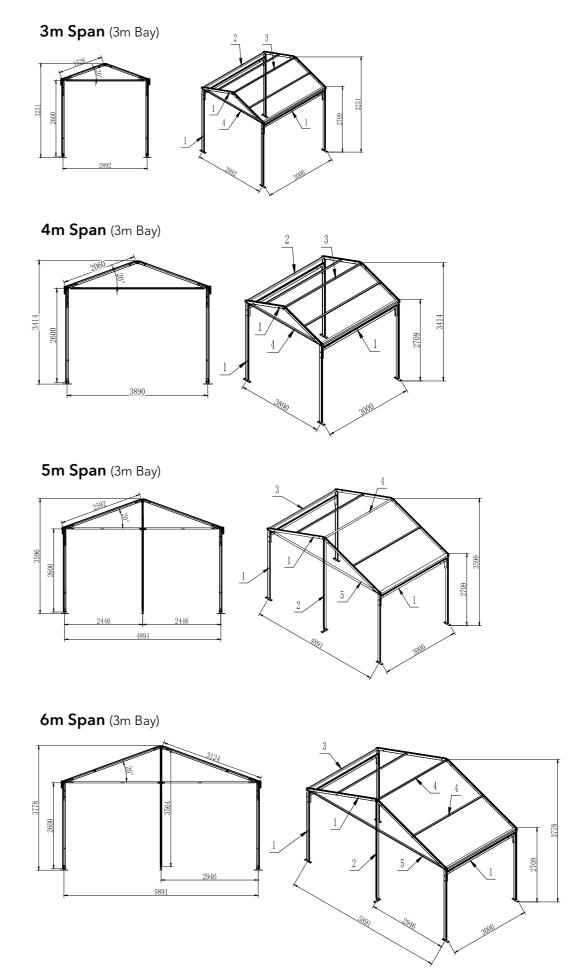

# Technical Information

8m Span (3m Bay)

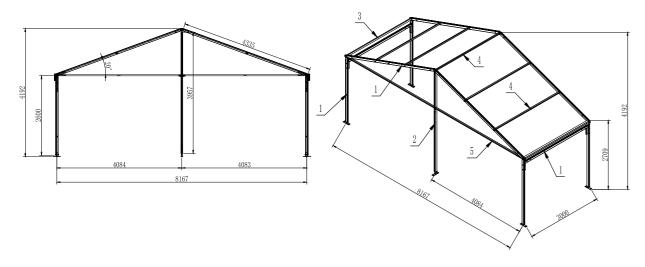

Roof Line Styles









A Frame

Acrum

# Frame Foot Plate Style



Standard Foot Plate



Hinge Foot Plate

# Fabric Colours

**Cover Material** 850gsm White or Coloured PVC | 950GSM Clear PVC Wall Fabrics 650gsm White PVC | 850gsm Coloured PVC | 950gsm Clear PVC









**Premium Colours** 

Completed projects using premium colours





Blue

# Printing

Large format digital printing refers to method of printing from a digital based image directly to the PVC marquee material. Once the print has dried a hot lacquer is applied to the print surface to seal the print to avoid scratches.













Clear









Black

# Accessories

### **Transpostation Box**

Transport boxes are custom to each order and are important to ensure the safety and protection of the Event Crest during transit and while in storage.





### Flooring

The flooring system are solid, waterproof & incorporate anti-slip technology making them ideal for most events. **Colours:** 

Black and selection of woodgrain colours.



### **PVC Windows**

Sidewalls are available with PVC clear windows in church, square, mesh and plain window varieties.

### Solid Walls

Lightweight, integrated system shares the same structure as the glass panels & door units allowing these items to be easily interchanged





### **Glass Doors and Walls**

The aluminium frame glass door system is available in both single and double-winged configurations.



### **Ceiling Interiors**

Add internal drapes to your event marquee for a touch of elegance.



### Awnings

These visually striking structural additions provide extra protection from the elements.



### Portable Conditioning

The air conditioning compressor and fan unit have been built onto a steel frame that can be easily moved into position on a trolley.











# Instructions



https://www.extreme-marquees.com.au/pdf/Crest/ Manuals/6x6m-FS-SERIES-84.pdf



https://www.extreme-marguees.com.au/pdf/Crest Manuals/6x9m-FS-SERIES-84.pdf



PDF

PDF

# 

Set-up Video https://vimeo.com/315817457

# **Engineer** Certificates



# What you will need for installation

Drill / Impact Driver x2
Socket Set & Shifter
Ladder x2
Mallet
Forklift / Crane / Scissor Lift *

Tape Measure Stringline Level Marking Pencil Stanley Knife

All crest from the Extreme Marquees range are temporary structures refer to engineer certification for more information about this product.

# Ground Fixings

The frame must be fixed and secure prior to installing the roof and wall fabric.

Ensure you have the correct ground fixings for your application.

### Grass: Steel Stakes


Fix each Base Plate with Steel Stakes. Ensure stakes are appropriately secured into the soft surface (Grass/Dirt).

**Concrete: Dynabolt** Fix each Base Plate with Dynabolts.

Weight Plate: Ground Mounting (suitable for any surface) Each Base Plate will need to have at least 200kg. Refer to engineer certificate for more information. Concrete block not supplied by Extreme Marquees



Click to vimeo channel



















P 1300 850 832 F 07 3355 7720 f @ admin@extreme-marquees.com.au 3 Bailey Court, Brendale, QLD, Australia 4500

**SHOP ONLINE** www.extreme-marquees.com.au