

EXTREME MARQUEES

AUSTRALIA'S PREMIER SUPPLIER OF CUSTOM PRINTED MARQUEES





EXTREME MARQUEES

WHAT YOU'LL NEED

Drill

Socket Set

Ladder

Mallet

Forklift / Crane / Scissor Lift *

Tape Measure

Stringline

Level

Marking Pencil

Stanley Knife

Alan Key (supplied)

Warning read instructions carefully before use.

Recommended procedure to follow in this document.

For safety reasons it is recommended that four persons set up any Crest Marquee.

Ensure area is free from any sharp objects & overhead objects.





www.extrememarquees.com.au 1300 850 832


PACKING LIST

	Item	Specification	Unit	Qty	Package
Aluminum Frame	adjustable tube	Φ32*1430	pc	1	1 steel box
	wall bar	Φ26*5000	pc	4	
	eave purlin	63*63*4846	pc	4	
	roof purlin	45*45*3536	pc	4	
	side leg	63*63*2394	pc	4	
	aluminum ground beam	160*144*4865	pc	4	
	aluminum ground beam in the middle	80*90*4705	pc	1	
PVC Fabric	double printed roof with D ring	3870*5000	pc	1	
	double printed wall	2560*4900	pair	4	
	insulation strip	Φ8*5000	pc	4	
Steel Parts	ridge connector	113*113*80	pc	1	
	corner connector	226*268*260	pc	4	
	special base plate for floor	185.3*189.3*186	pc	4	
	top cap	Φ290*346	pc	1	
	bolts	M10*30	pc	5	
	bolts and nuts	M10*80	set	5	
	small weight plate	500*500	pc	4	
	bolts	M16X35	pc	14	
	washer	Φ35-40*16	pc	14	
	steel box	5050*610*600	pc	1	
Floor	floor A	1226*2397	pc	6	
	floor B	1114*2397	pc	2	


SETOUT PLAN

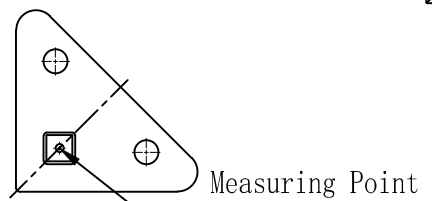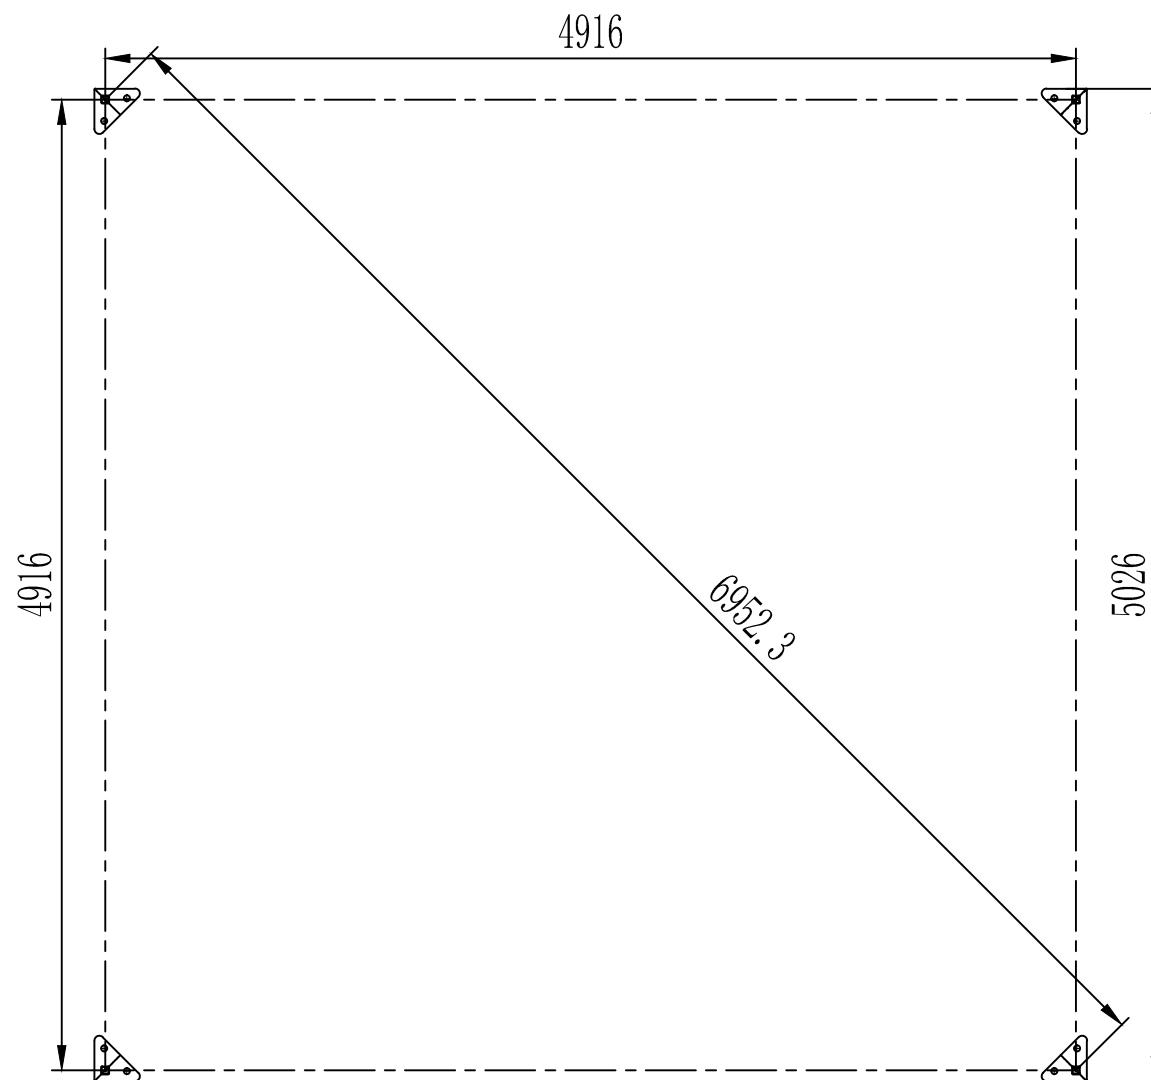

FRAME DRAWING

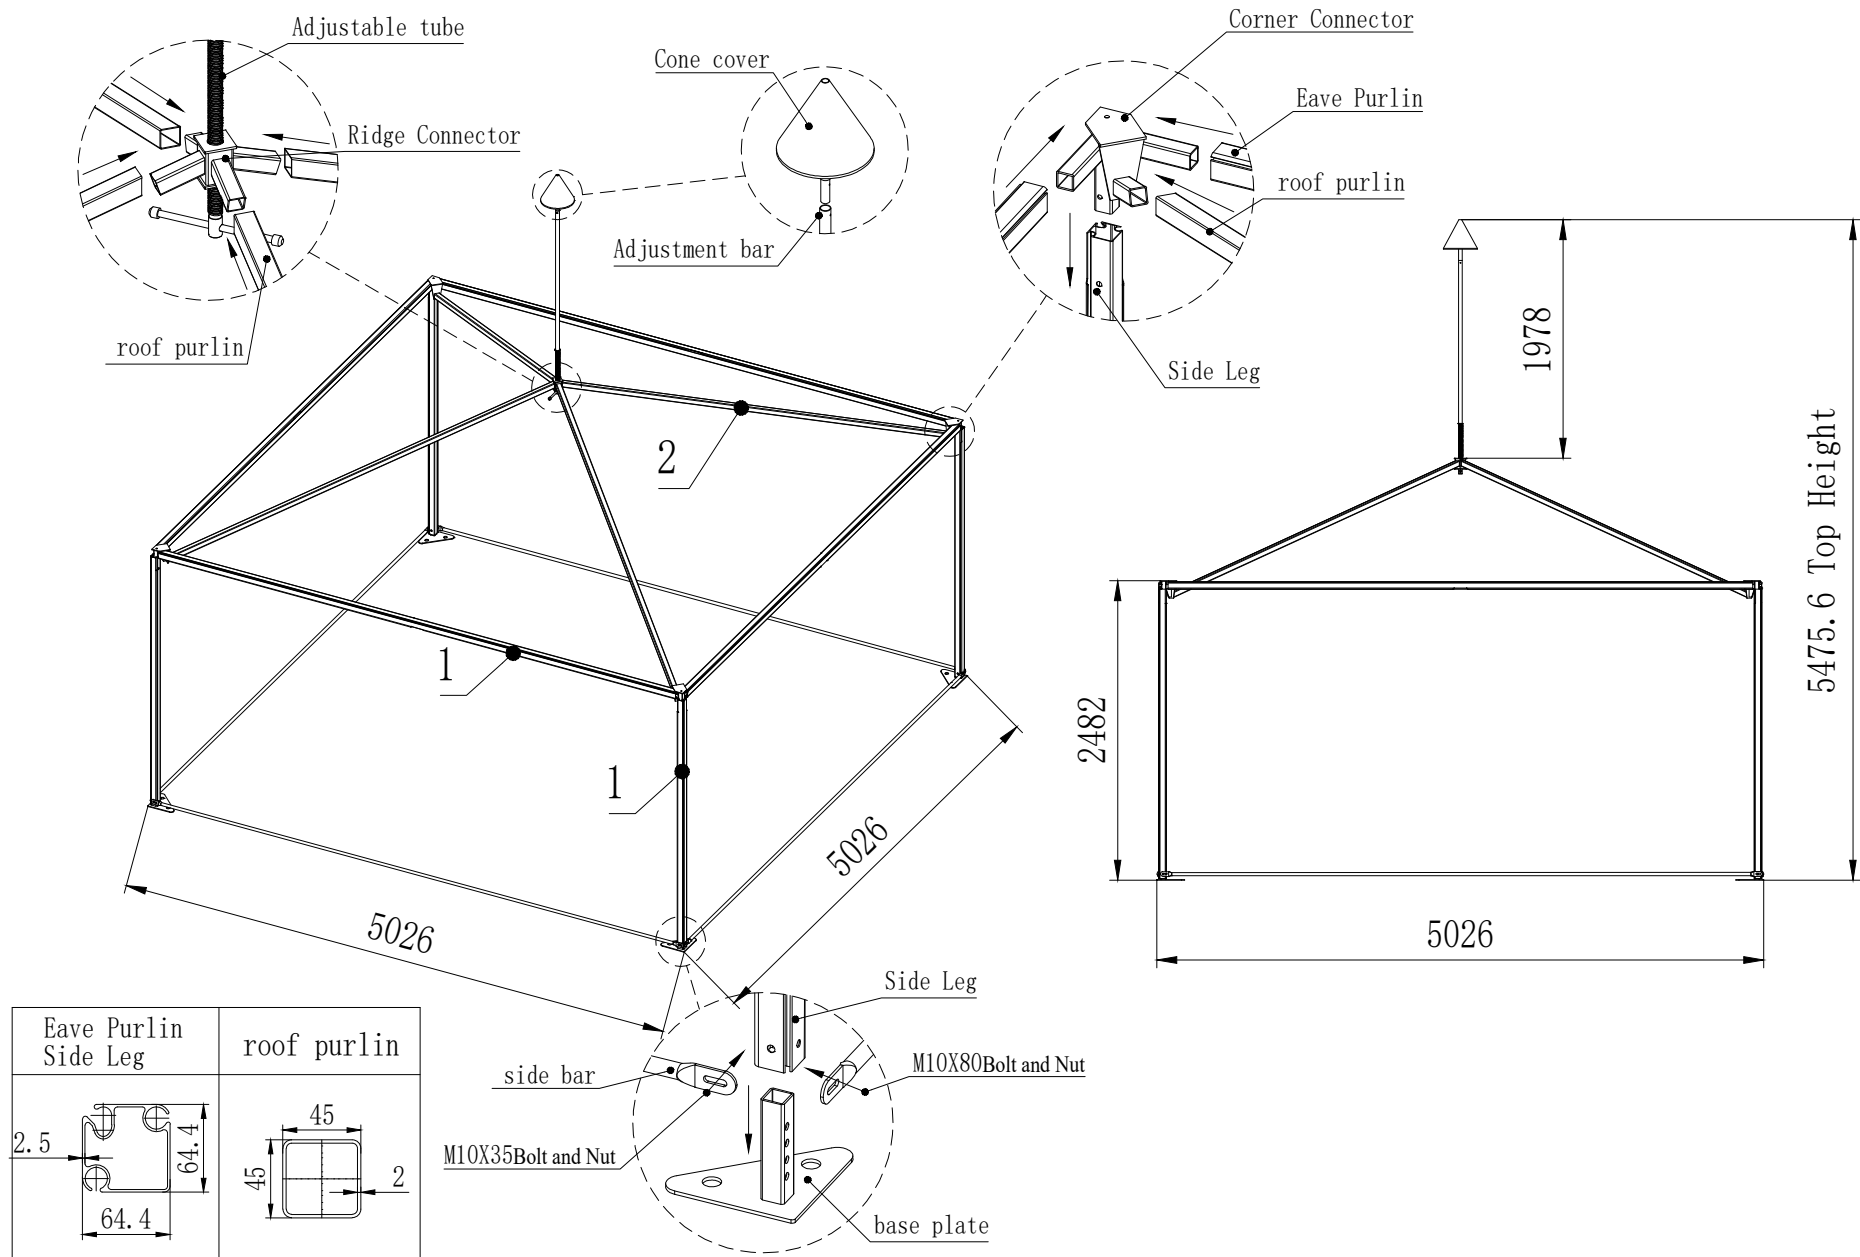


1

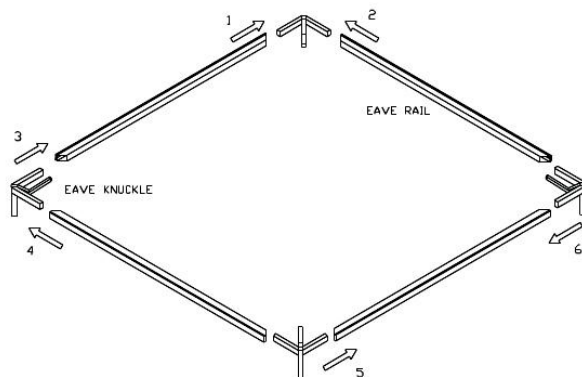


Lay out 4 x Eave Rails and 4 x Corner Connectors as above.

2

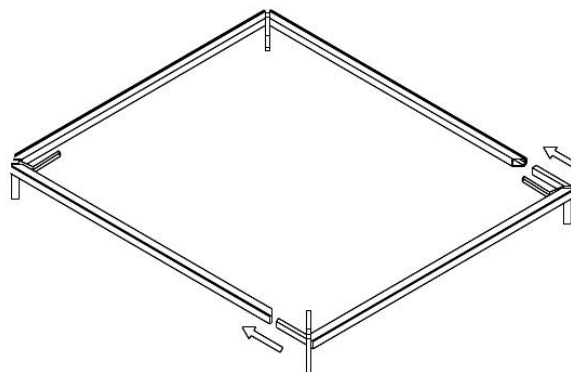


Fit together as shown.

3

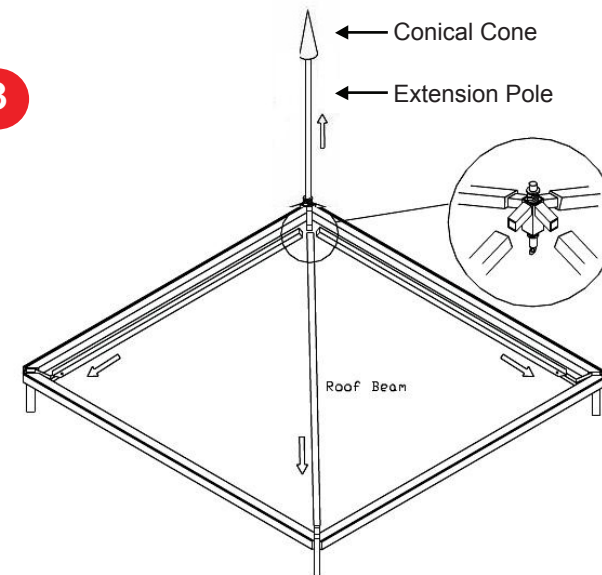


Insert 4 x Roof Beams to Corner Connectors then fit Roof Adjuster (make sure it is wound down to the lowest point).

4

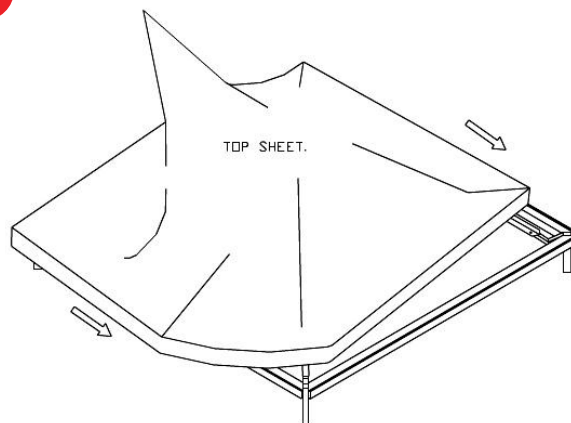

Fit roof over the frame.


5

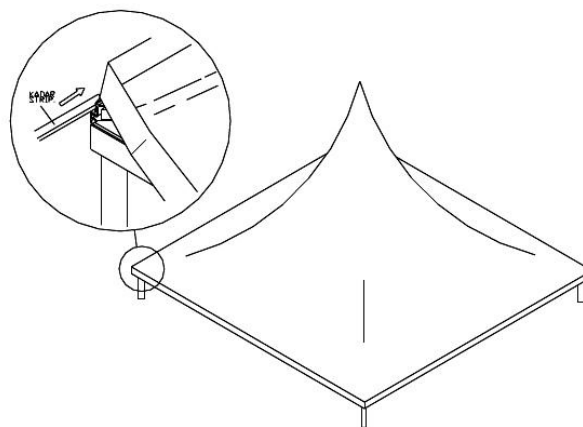

Fit Roof Keder into outer sail track on the side of the Eave Beam. Insert Kedar strip into the top of the roof in this same track.


Repeat on all sides.

6

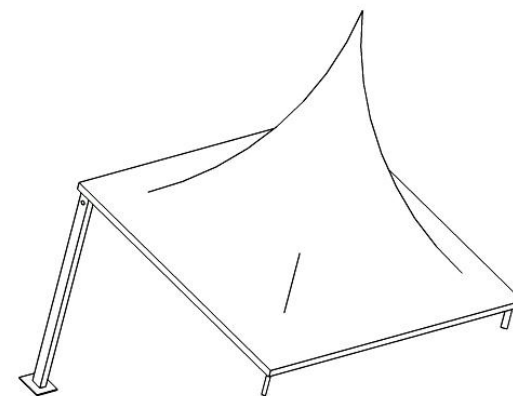


Fit foot plates to all legs using 2 or more people. Raise one side and fit 2 x legs. Fit extension pole and conical cone before fitting remaining legs.

7

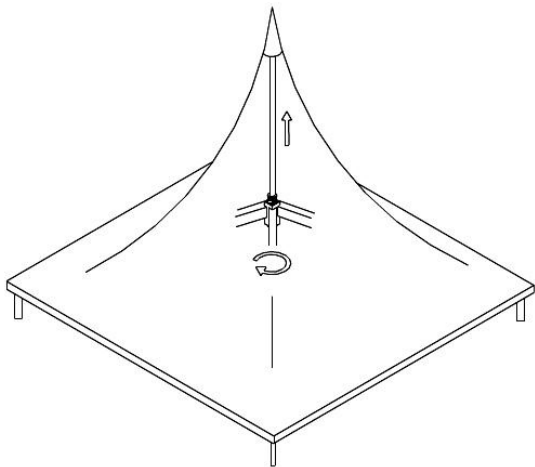

Wind up Roof Adjuster until tight.


8

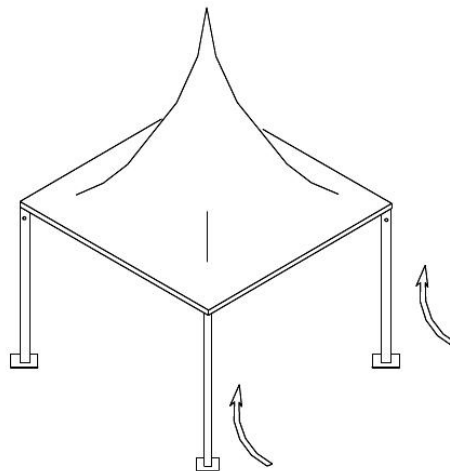

Raise other side and fit legs.


Make sure Marquee is secured to ground by approved methods.

9


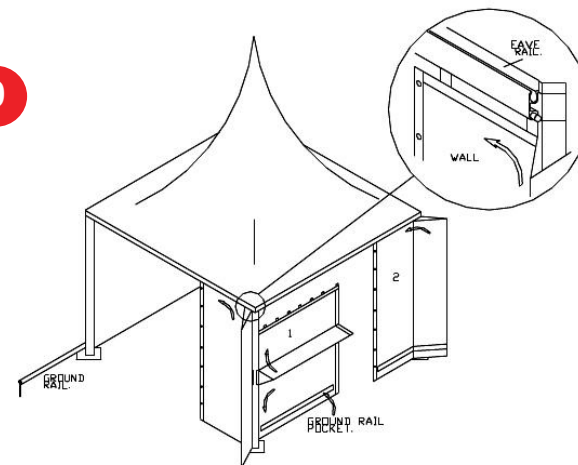


Fit walls into sail track.


1 Assemble Frames on ground and prepare for erection.

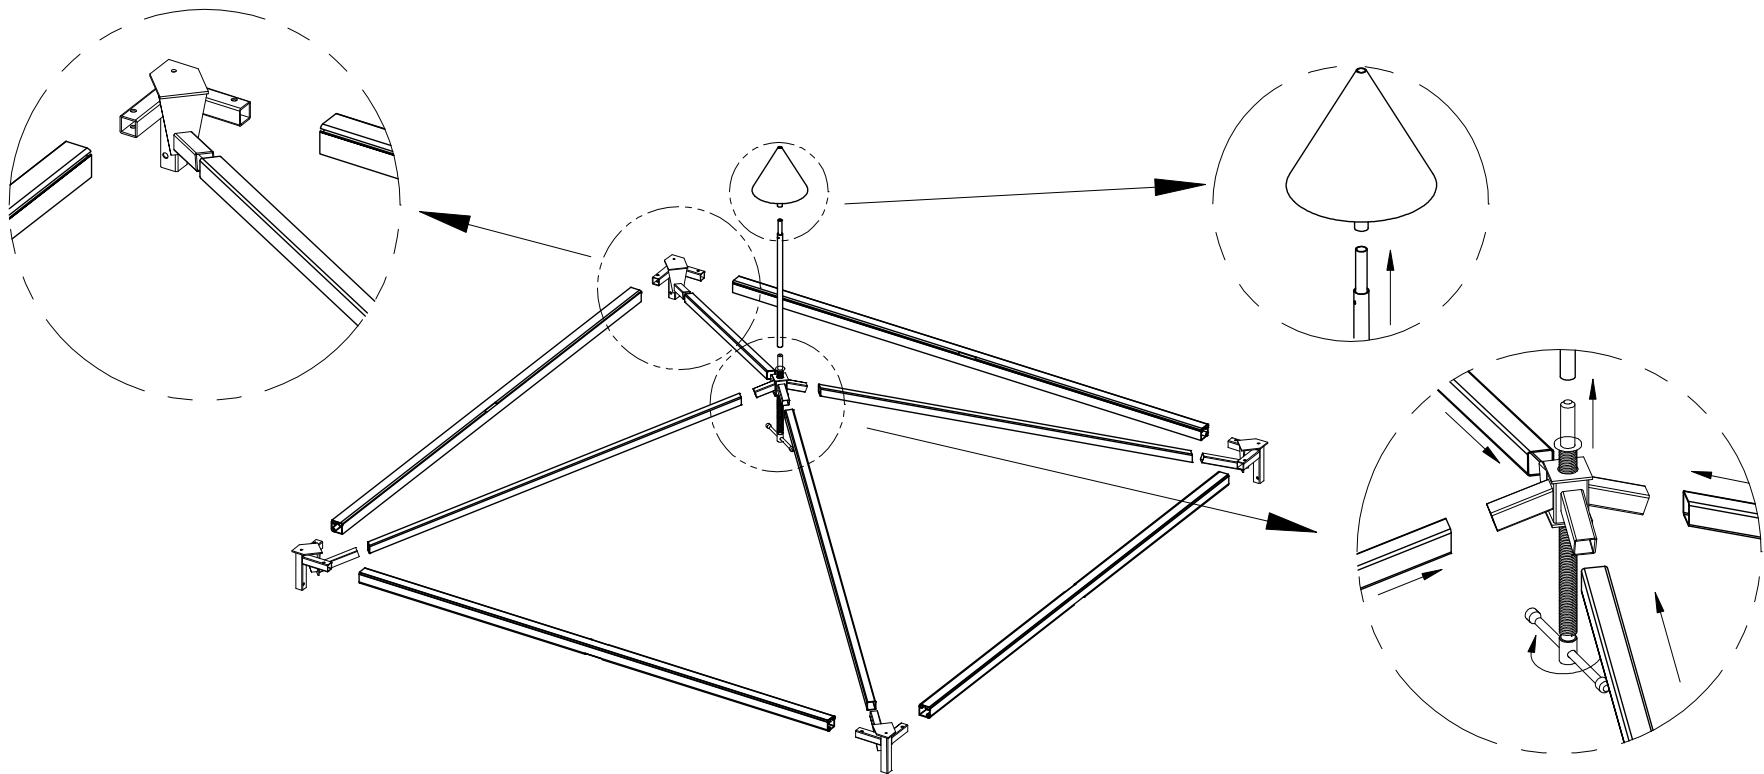

2 Roof Cover

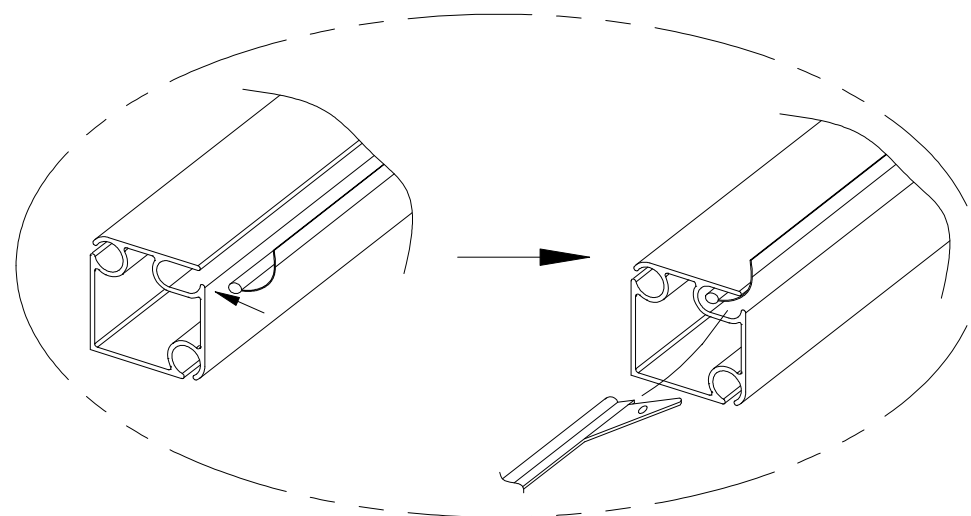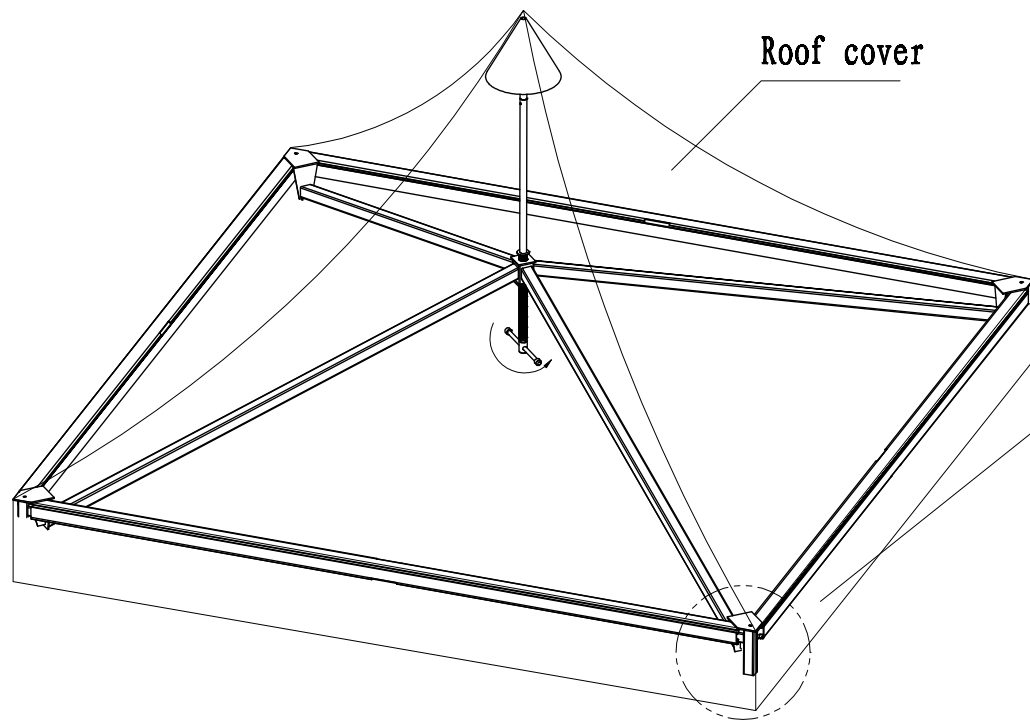

3 Upright Support

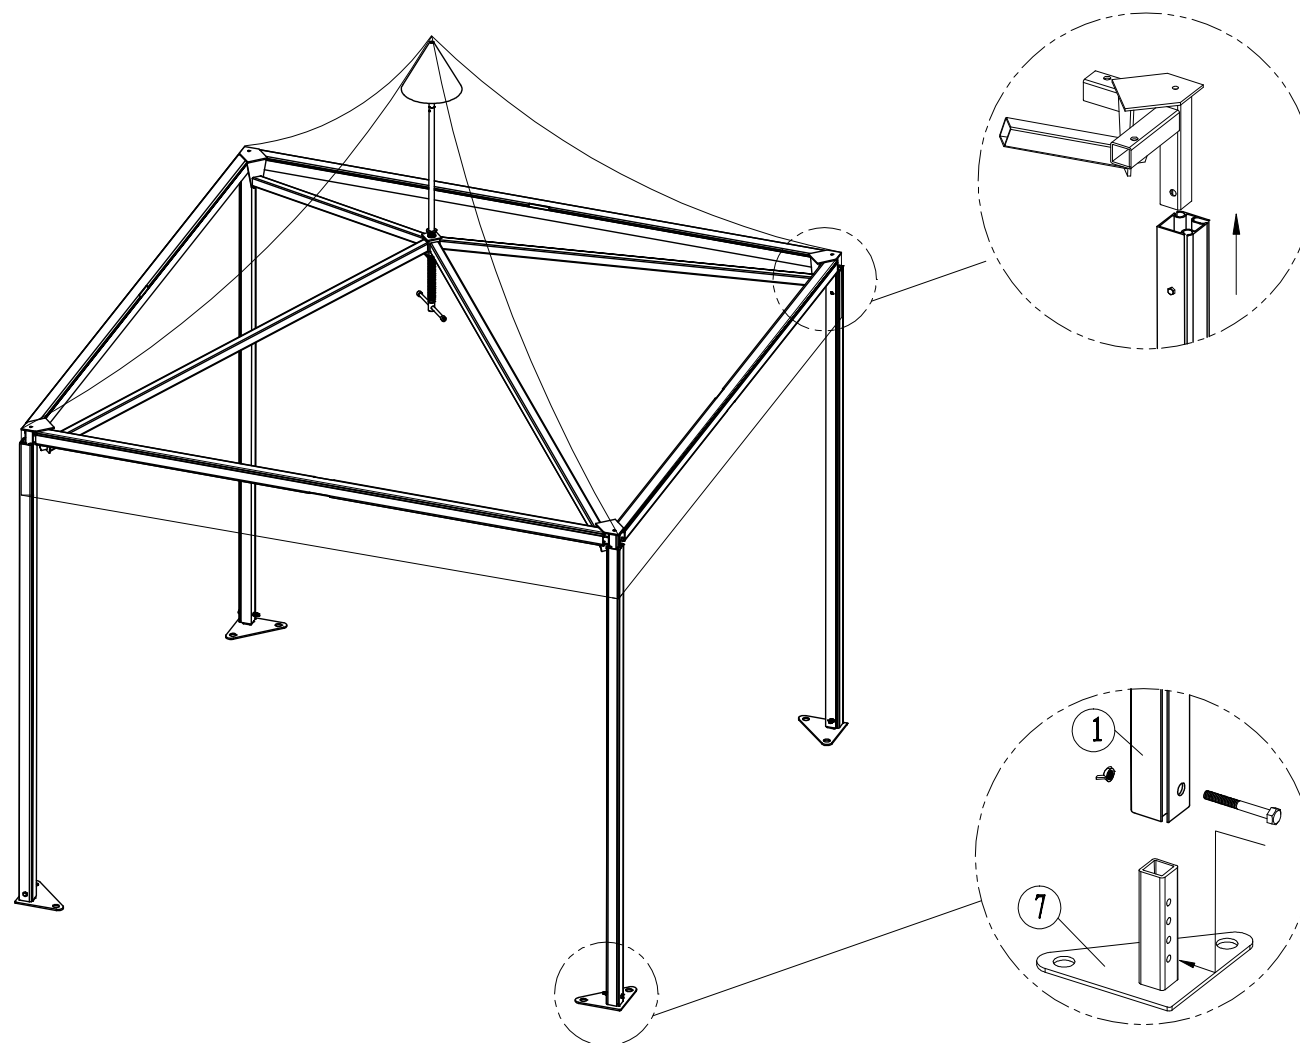

4 Sidewalls

