

The logo for Extreme Marquees features a stylized red and black swoosh above the company name.

EXTREME MARQUEES

AUSTRALIA'S PREMIER SUPPLIER OF CUSTOM PRINTED MARQUEES





EXTREME MARQUEES

WHAT YOU'LL NEED

Drill

Socket Set

Ladder

Mallet

Forklift / Crane / Scissor Lift *

Tape Measure

Stringline

Level

Marking Pencil

Stanley Knife

Alan Key (supplied)

Warning read instructions carefully before use.


Recommended procedure to follow in this document.

For safety reasons it is recommended that four persons set up any Crest Marquee.


Ensure area is free from any sharp objects & overhead objects.



DO134674 - Dragonfly Catering and Events **SETOUT PLAN**

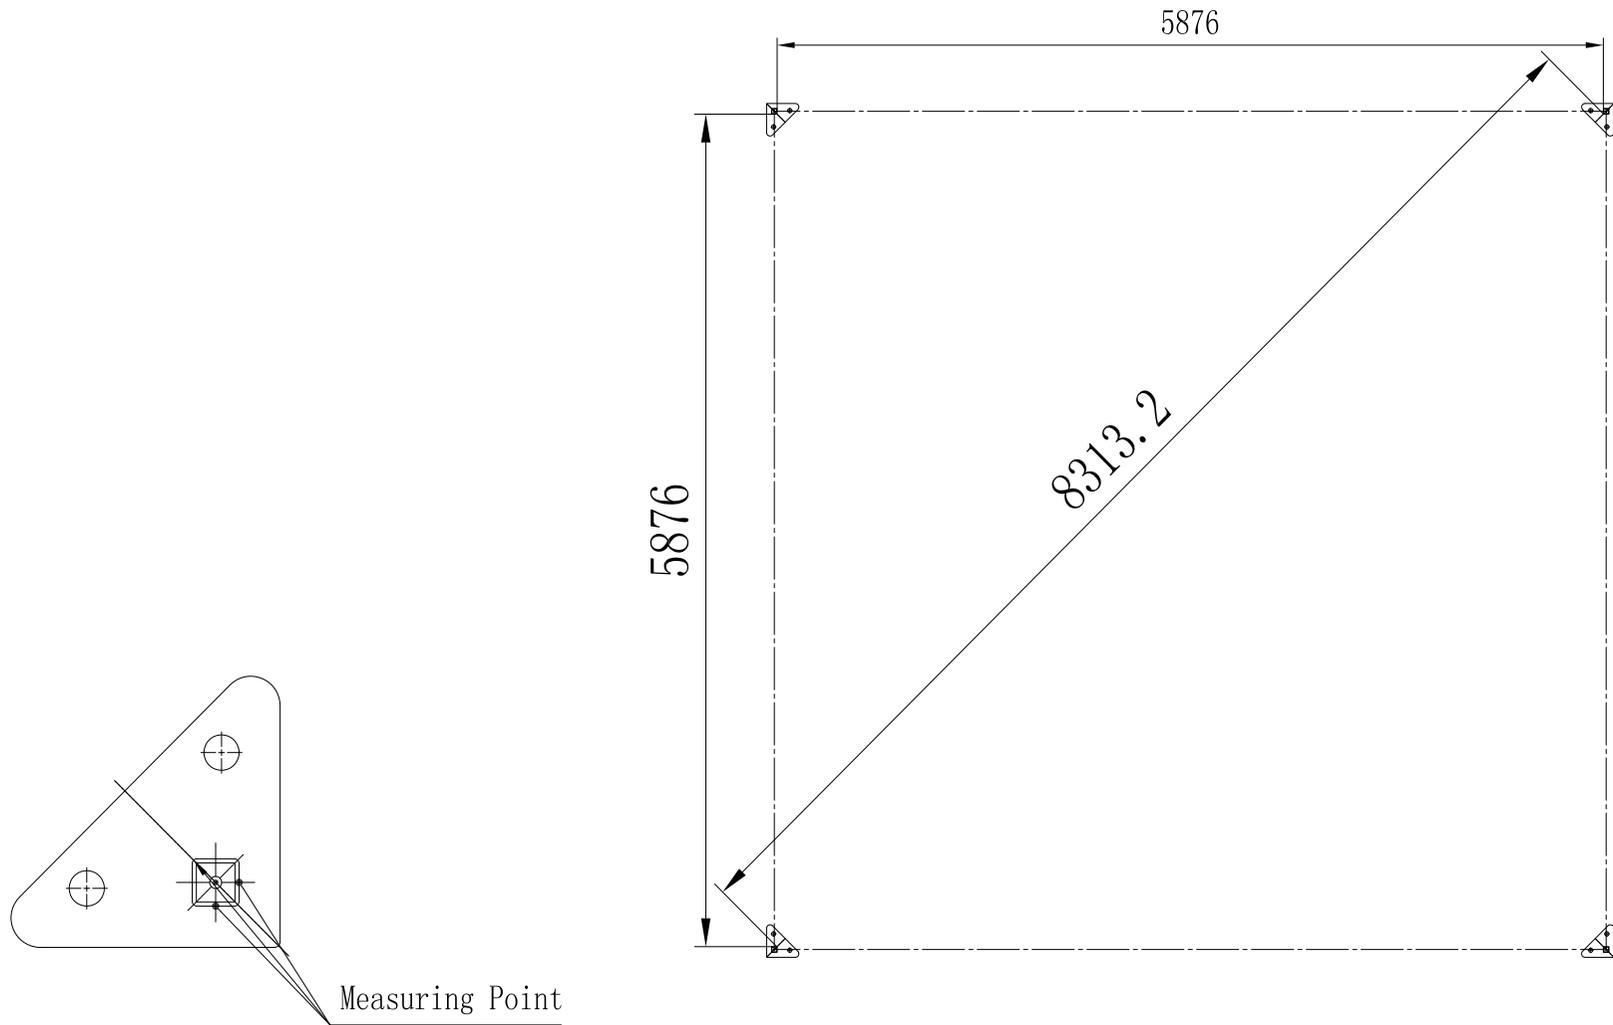


DO134674 - Dragonfly Catering and Events ELEVATION

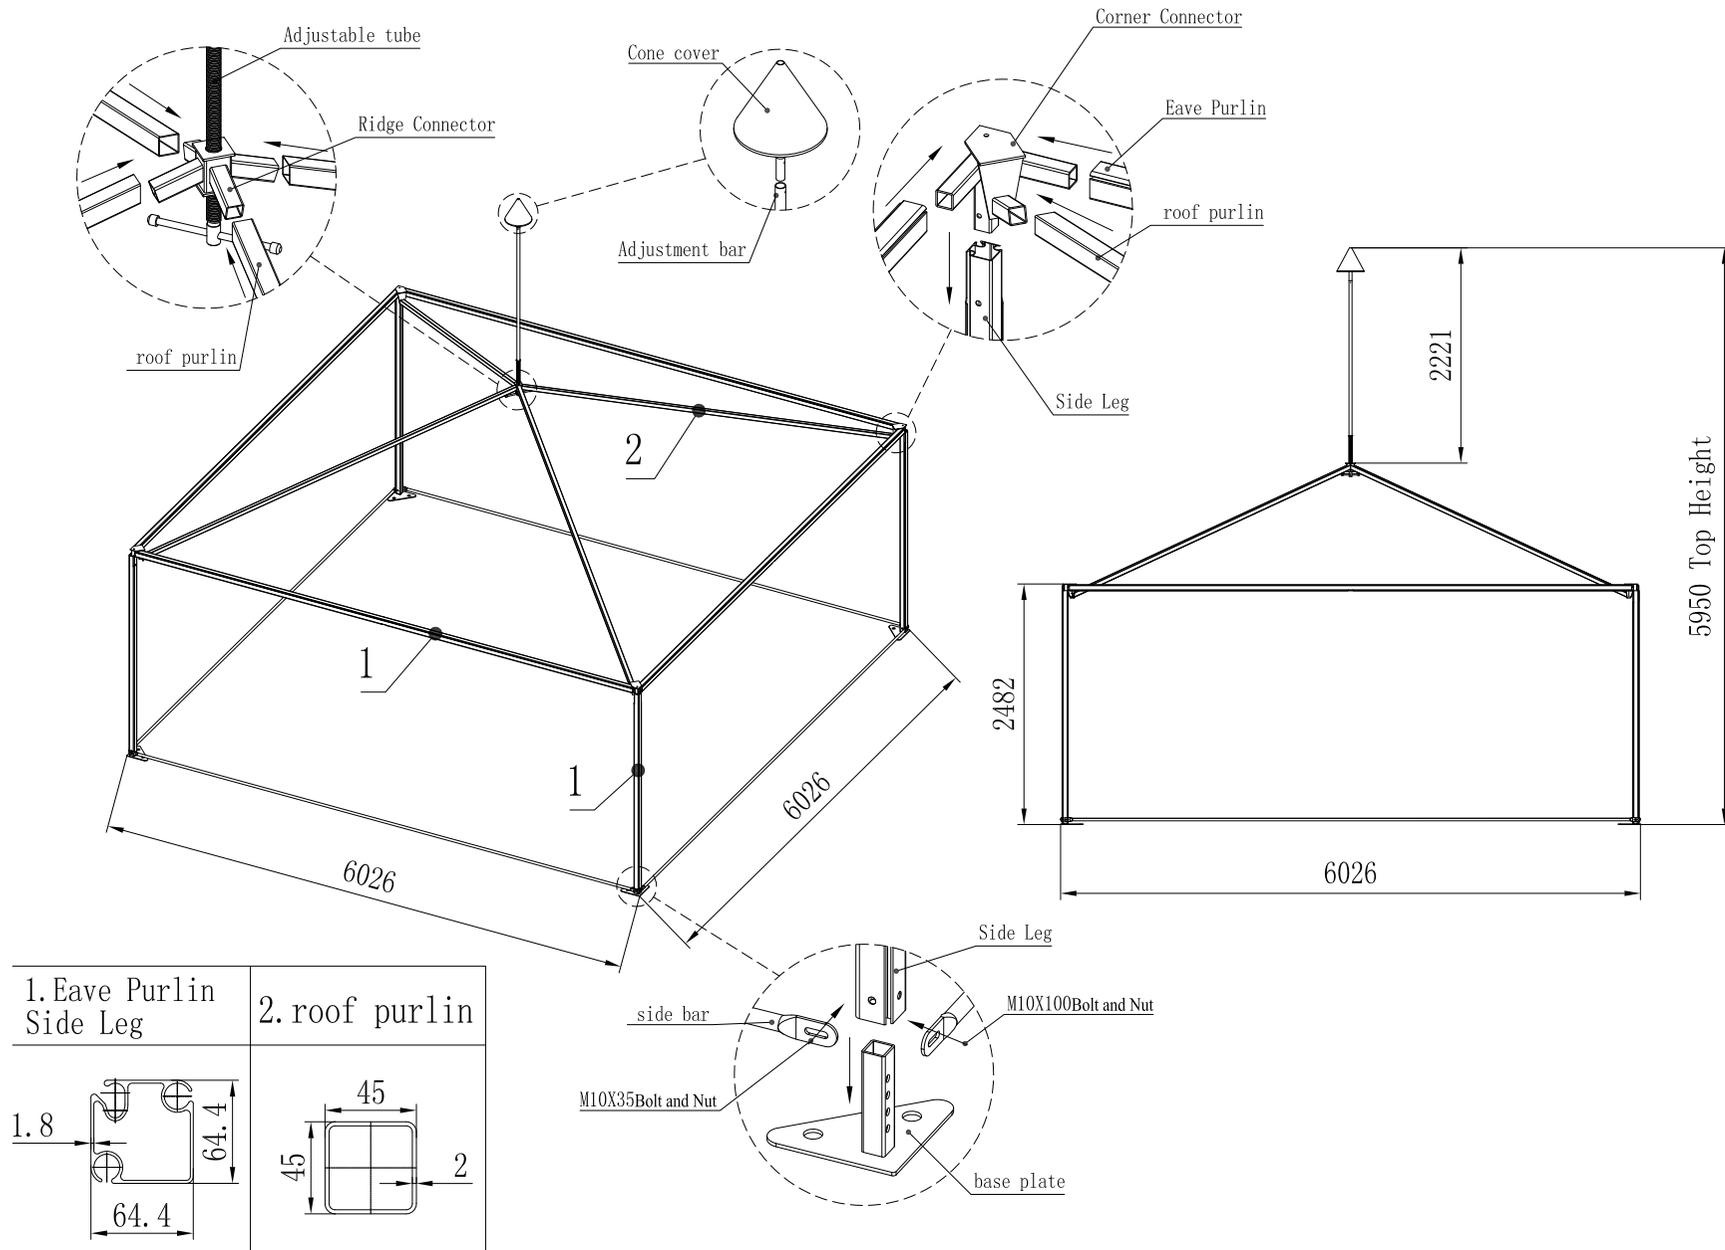

DO134674 - Dragonfly Catering and Events **PACKING LIST**


Item	Item Name	Specification	Unit	Qty	Packing
Steel Components and PVC Fabric	base plate	N/A	pc	8	2 bags with 2 box
	corner connector	N/A	pc	8	
	top connector	N/A	pc	2	
	top cap	N/A	pc	2	
	bolts	M10*80	pc	8	
	expansion bolts	M10*100	pc	8	
	roof cover	6000*6000	pc	2	
	side wall	2500*6000	pair	8	
	installation keder fabric	Φ8*6000	pc	8	
Aluminum Frame	eave purlin	65*65*5846	pc	8	6 bundles
	side legs	65*65*2400	pc	8	
	roof purlins	45*45*4286	pc	8	
	middle support tube	Φ32*1770	pc	2	
	bearing bar for walls	Φ25*6000	pc	8	

1

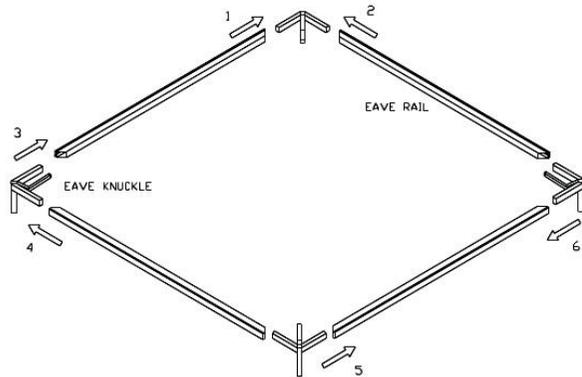


Lay out 4 x Eave Rails and 4 x Corner Connectors as above.

2

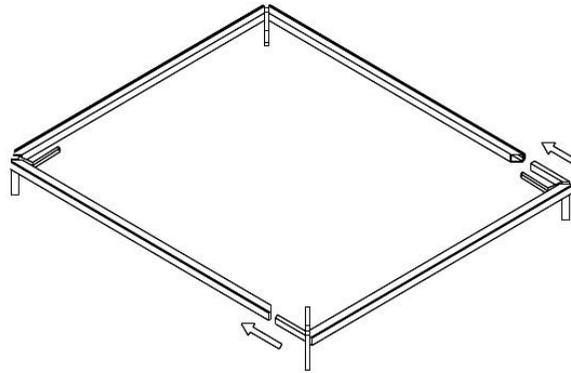


Fit together as shown.

3

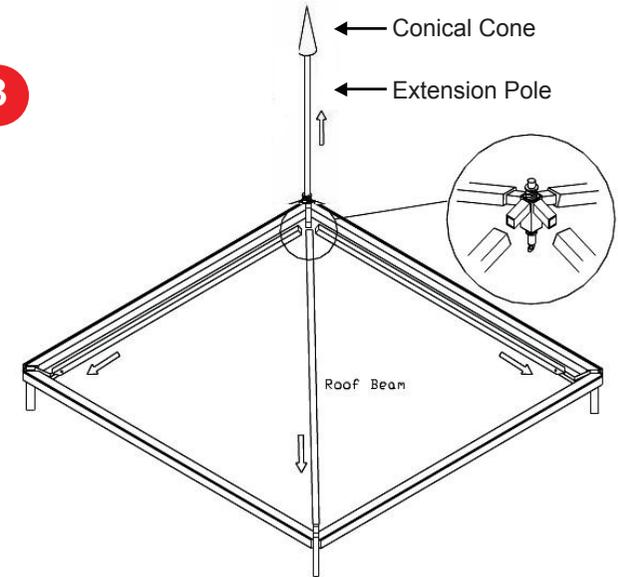


Insert 4 x Roof Beams to Corner Connectors then fit Roof Adjuster (make sure it is wound down to the lowest point).

4

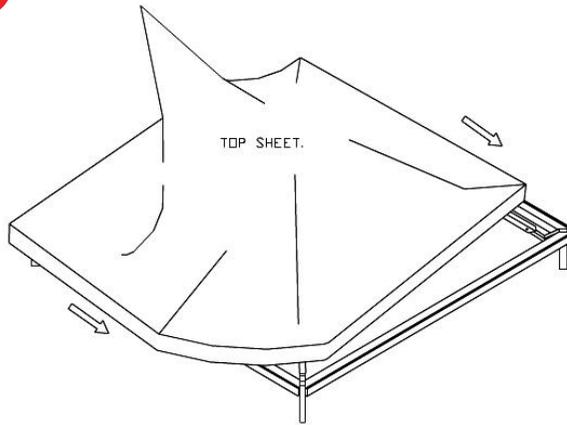

Fit roof over the frame.


5

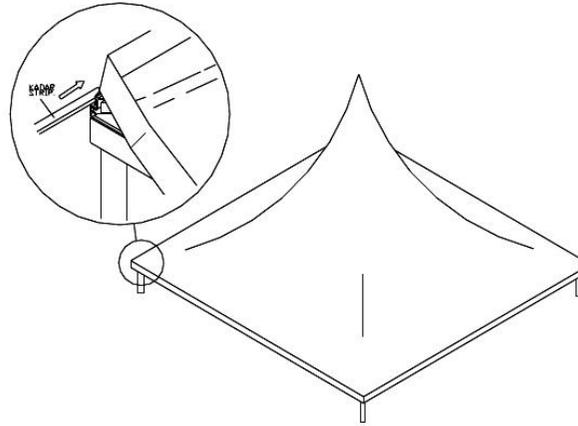

Fit Roof Keder into outer sail track on the side of the Eave Beam. Insert Kedar strip into the top of the roof in this same track.


Repeat on all sides.

6

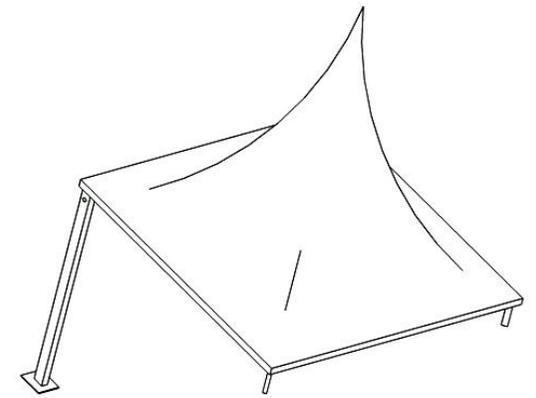


Fit foot plates to all legs using 2 or more people. Raise one side and fit 2 x legs. Fit extension pole and conical cone before fitting remaining legs.

7

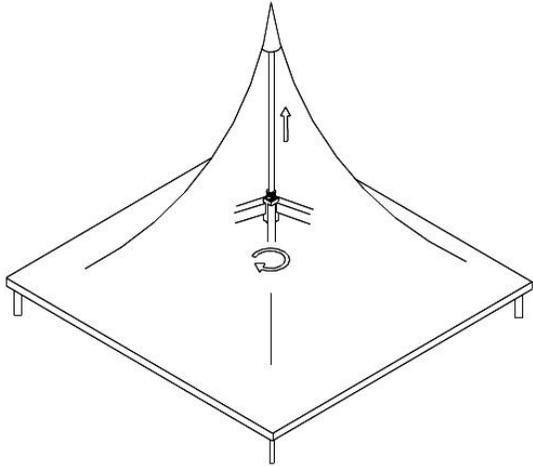

Wind up Roof Adjuster until tight.


8

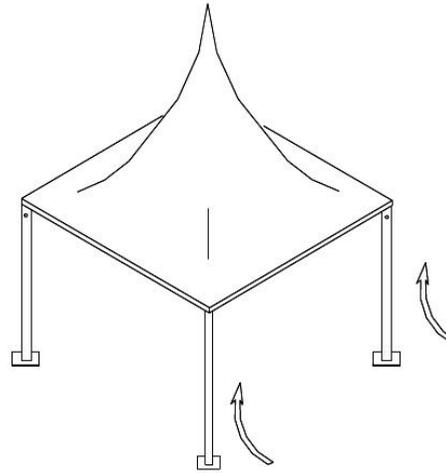

Raise other side and fit legs.


Make sure Marquee is secured to ground by approved methods.

9


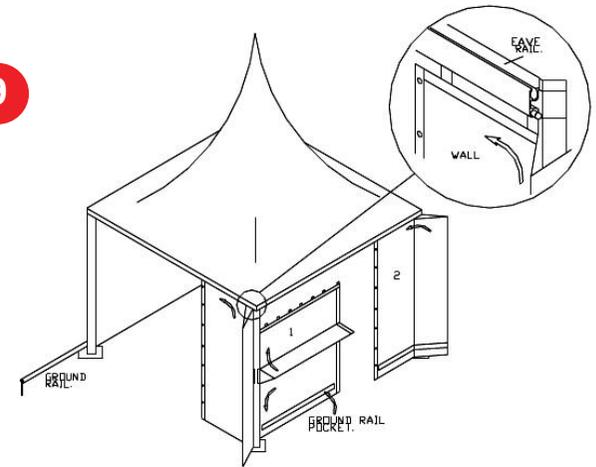


Fit walls into sail track.


1 Assemble Frames on ground and prepare for erection.

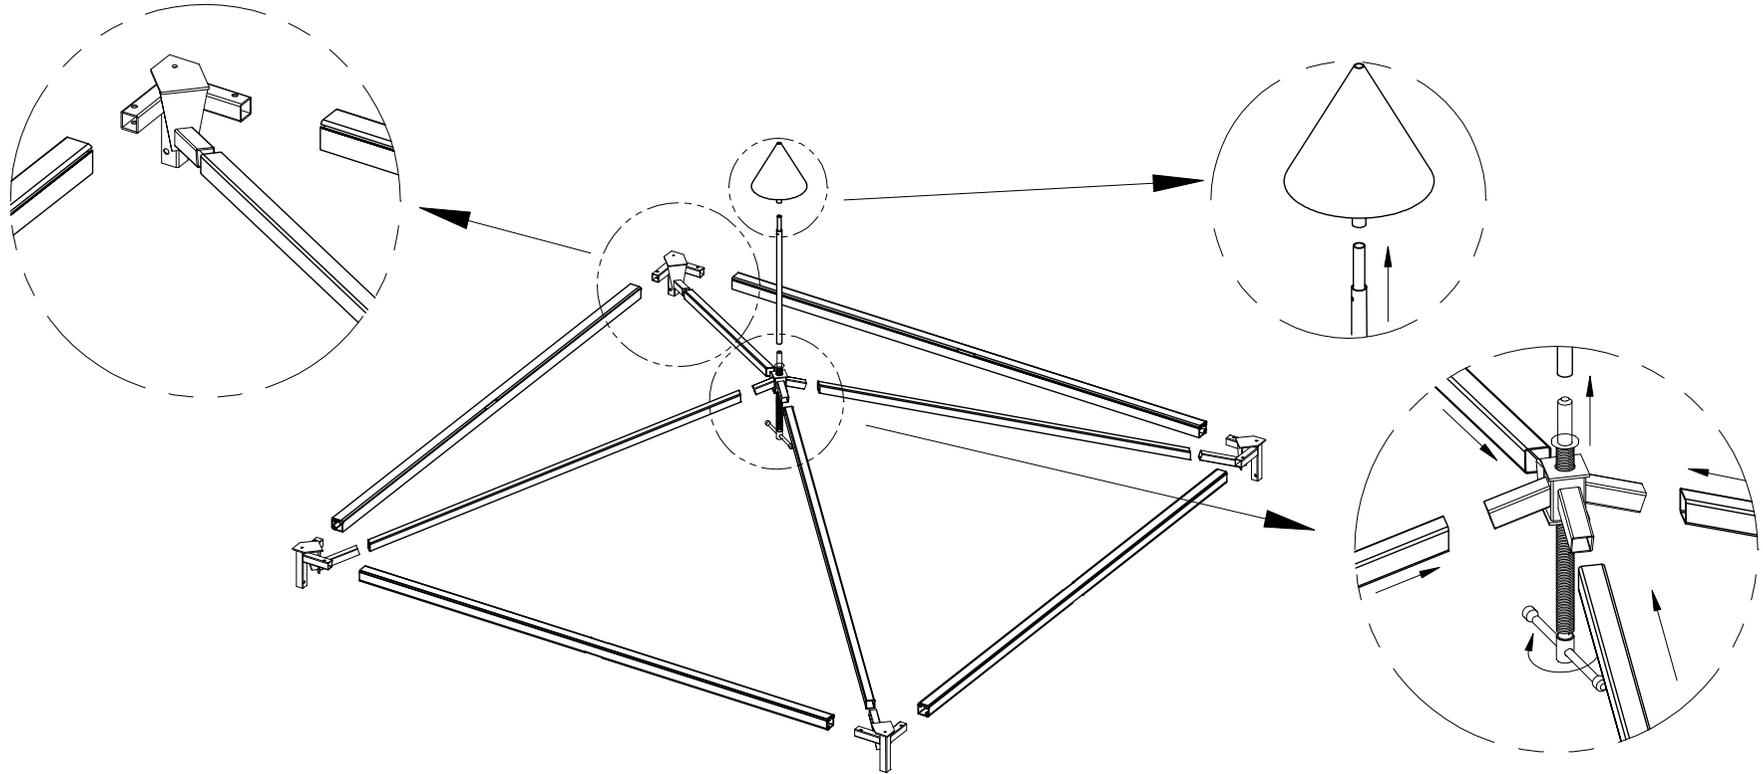

2 Roof Cover

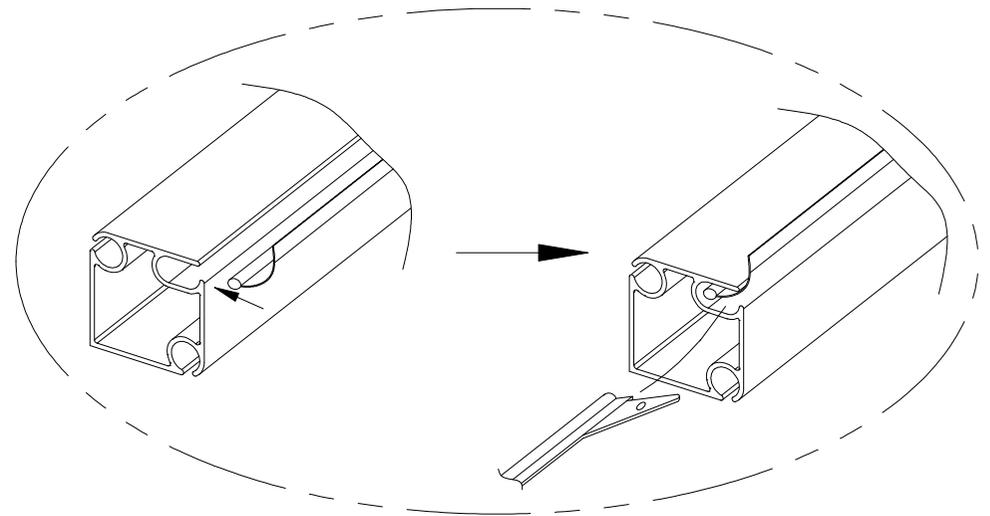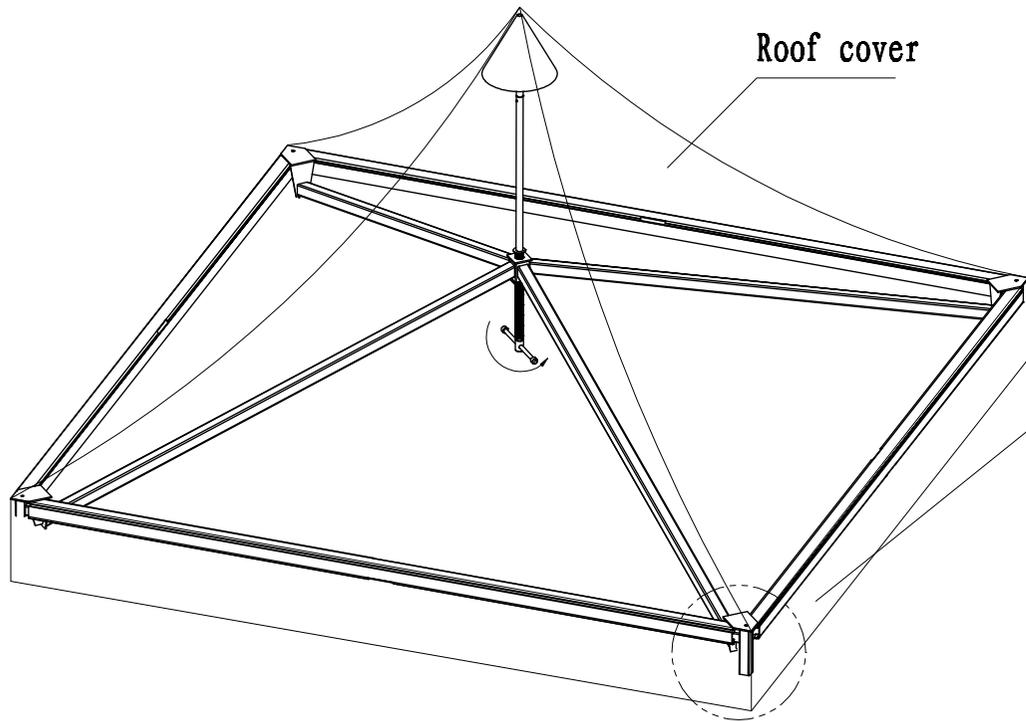

3 Upright Support

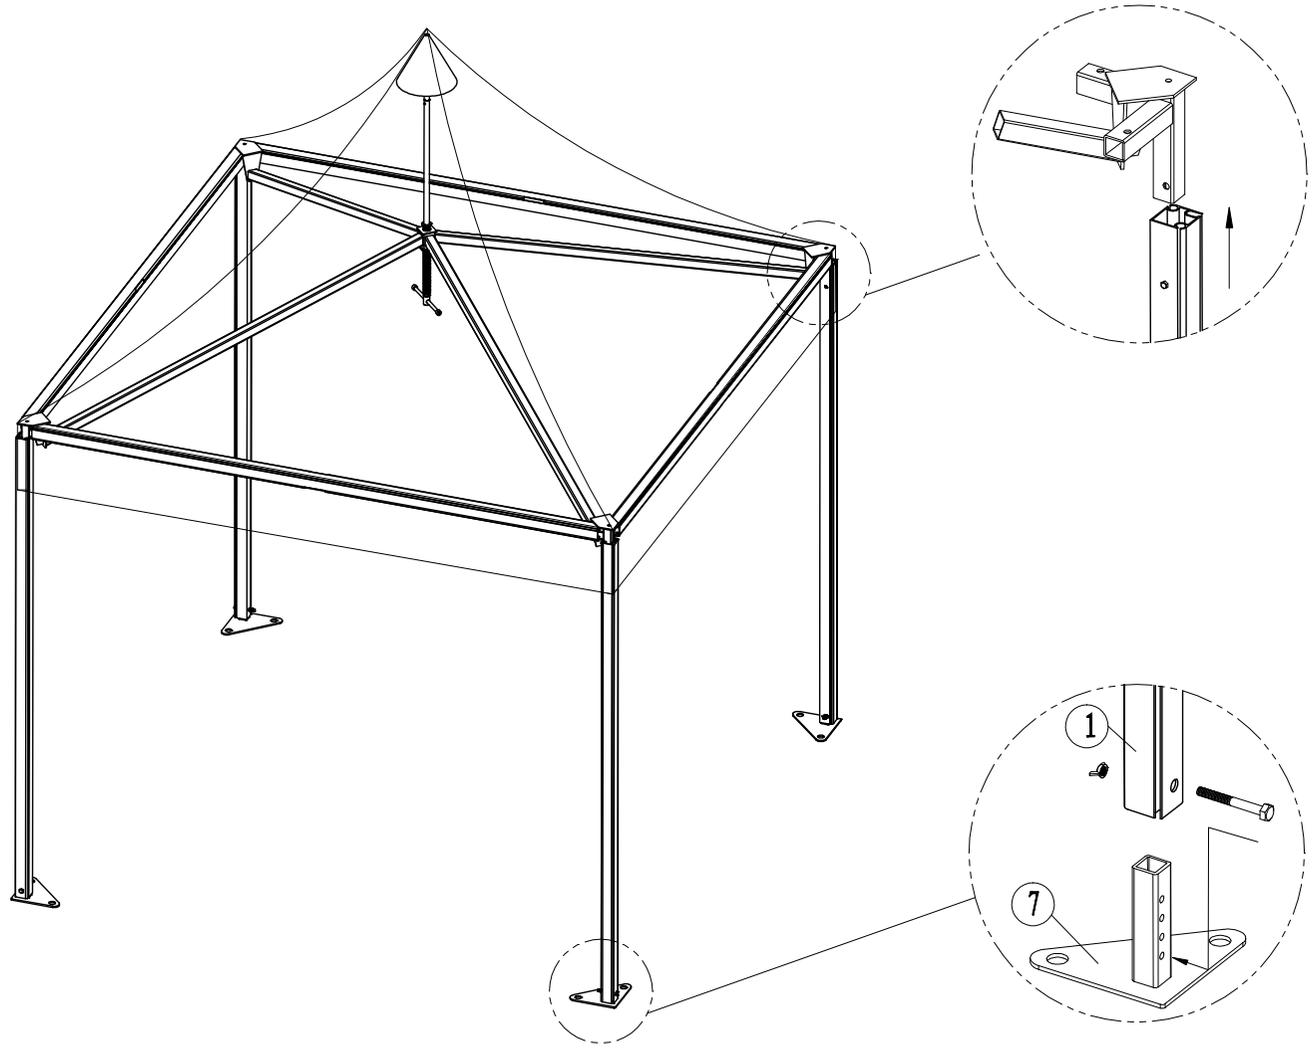

4 Sidewalls

