CREST RANGE

EVENT STANDARD SERIES

Main Profile 122 x 68 x 3mm, 4-channel













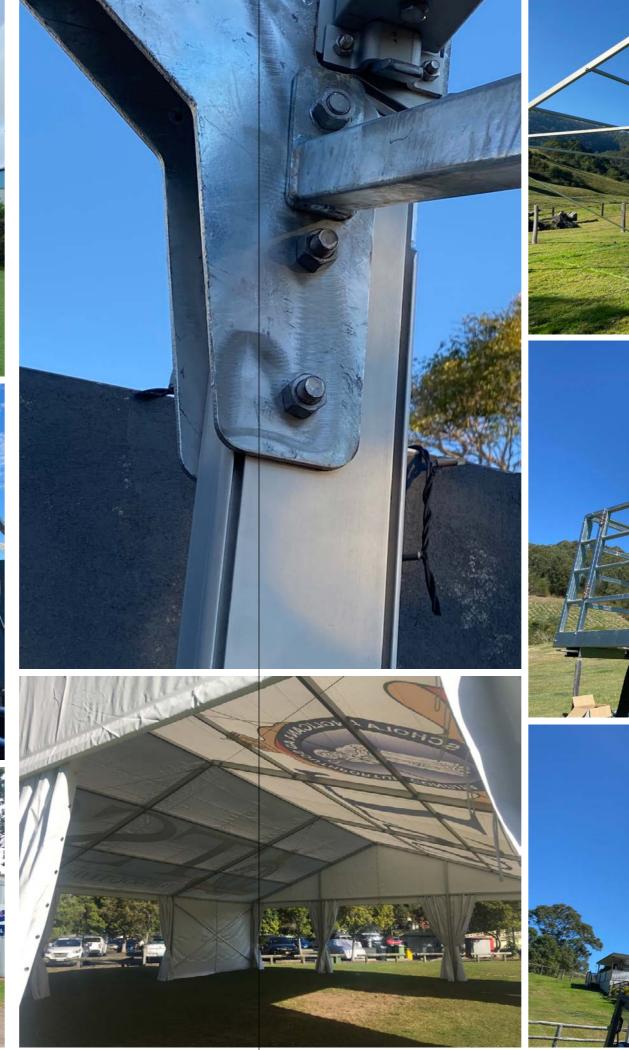




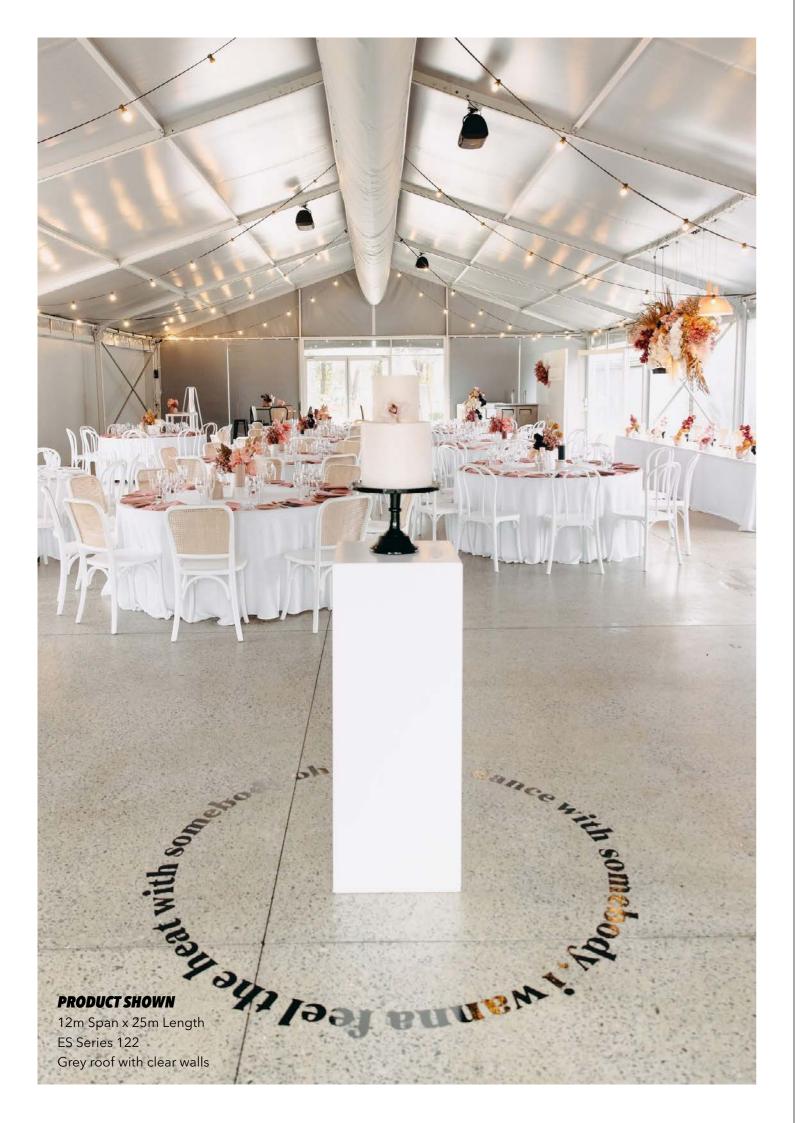

ES 122


The Event Standard (ES) Series features our professional 5m bay event marquees. Available in with widths of 8m, 10m and 12m with a ridge height of 3m.

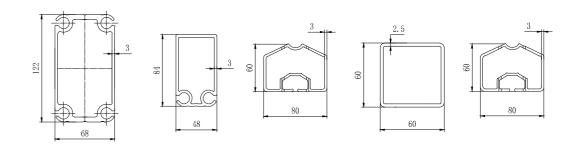

Overview

Event Marquee Size

Span Width: 8m/ 10m/ 12m Bay Distance: 5m Minimum Tent Length: 5m Maximum Tent Length: No Limit Roof Pitch: 20°

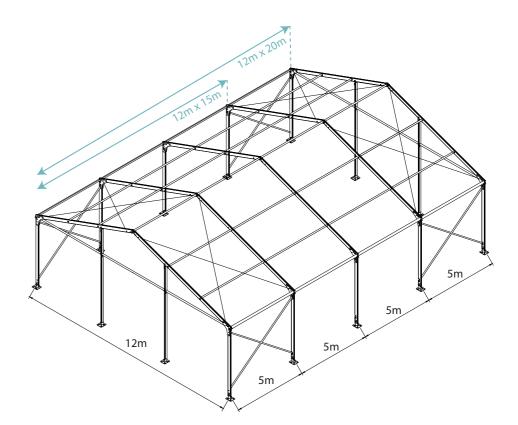



Frame Specifications

Eave Height: 3m Main Profile: 122 x 68 x 3mm Roof Fixing: Bar Tensioning Max Windspeed: 80km/hr

Specifications




Clear-Span Width	8m	10m	12m
Eave Height	3m		
Ridge Height	4.44m	4.76m	5.20m
Roof Pitch	20°		
Bay Distance	5m		
Longest Component	4.4m	5.5m	5.4m
Minimum Tent Length	5m		
Maxmimum Tent Length	No Limit		
Roof Fixing	Bar Tensioning		
Main Profile	122 x 68 x 3mm (4-channel)		
Max Allowed Windspeed	80km/hr 0.3kn/m2		
Eave Connection	Hot-dip galvanized steel insert		
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)		
Cover Material Wall Fabrics	850gsm white or coloured PVC 950gsm clear PVC 650gsm White PVC		
Printing	Full Roof Digital Printing		
Certification	8m 10m 12m Engineer Certification Fire Reterdant PVC		
Manufacturer's Warranty	10 Year Frame 5 Year White/Coloured PVC 2 Year Printed PVC/Clear PVC		




Technical Information


8m Span (5m Bay)

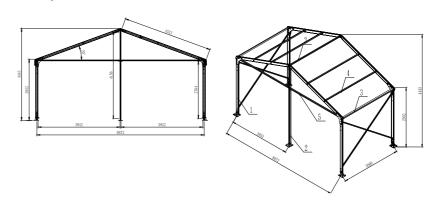


10m Span (5m Bay)





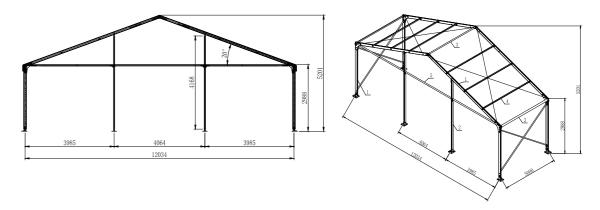



Roof Line Styles









A Frame

Acrum

Frame Foot Plate Style



Standard Foot Plate



Hinge Foot Plate

Fabric Colours

Cover Material 850gsm White or Coloured PVC | 950GSM Clear PVC Wall Fabrics 650gsm White PVC | 850gsm Coloured PVC | 950gsm Clear PVC



Grey





Premium Colours

Completed projects using premium colours





Blue

Printing

Large format digital printing refers to method of printing from a digital based image directly to the PVC marquee material. Once the print has dried a hot lacquer is applied to the print surface to seal the print to avoid scratches.











Clear









Black

Accessories

Transpostation Box

Transport boxes are custom to each order and are important to ensure the safety and protection of the Event Crest during transit and while in storage.





Flooring

The flooring system are solid, waterproof & incorporate anti-slip technology making them ideal for most events. **Colours:**

Black and selection of woodgrain colours.



PVC Windows

Sidewalls are available with PVC clear windows in church, square, mesh and plain window varieties.

Solid Walls

Lightweight, integrated system shares the same structure as the glass panels & door units allowing these items to be easily interchanged





Glass Doors and Walls

The aluminium frame glass door system is available in both single and double-winged configurations.



Ceiling Interiors

Add internal drapes to your event marquee for a touch of elegance.



Awnings

These visually striking structural additions provide extra protection from the elements.



Portable Conditioning

The air conditioning compressor and fan unit have been built onto a steel frame that can be easily moved into position on a trolley.











Instructions



PDF 6m x 9m PDF ES Series 122





Set-up Video https://vimeo.com/315811502

Engineer Certificates



What you will need for installation

Drill / Impact Driver x2		
Socket Set & Shifter		
Ladder x2		
Mallet		
Forklift / Crane / Scissor Lift *		

Tape Measure Stringline Level Marking Pencil Stanley Knife

All crest from the Extreme Marquees range are temporary structures refer to engineer certification for more information about this product.

Ground Fixings

The frame must be fixed and secure prior to installing the roof and wall fabric.

Ensure you have the correct ground fixings for your application.


Grass: Steel Stakes Fix each Base Plate with Steel Stakes. Ensure stakes are appropriately secured into the soft surface (Grass/Dirt).

Concrete: Dynabolt Fix each Base Plate with Dynabolts.

Weight Plate: Ground Mounting (suitable for any surface) Each Base Plate will need to have at least 200kg. Refer to engineer certificate for more information. Concrete block not supplied by Extreme Marquees

Completed Projects

Click to vimeo channel



















P 1300 850 832 F 07 3355 7720 f @ admin@extreme-marquees.com.au 3 Bailey Court, Brendale, QLD, Australia 4500

SHOP ONLINE www.extreme-marquees.com.au